




Technical Data Sheet

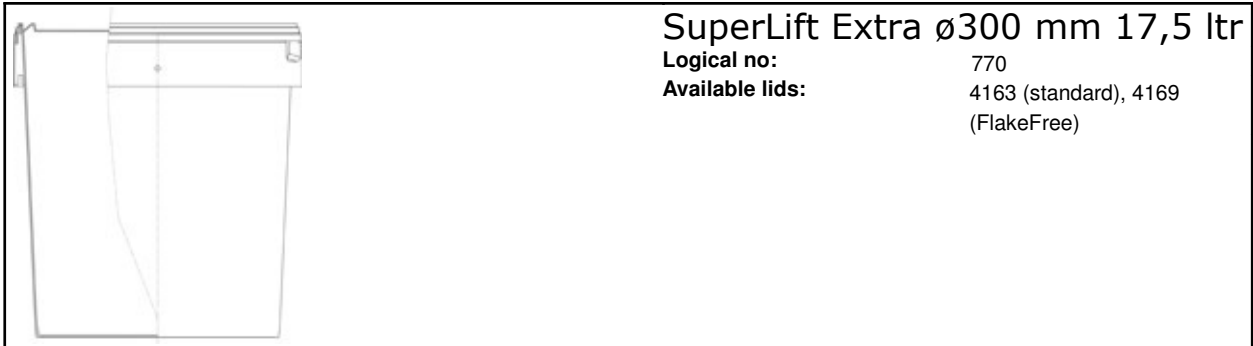

SuperLift Extra ø300 mm 17,5 ltr

Logical no: 770
Available lids: 4163 (standard), 4169 (FlakeFree)

Volume		Volume under lid: 17,2 ltr +/- 180 ml		Volume brimful: 18,0 ltr +/- 180 ml	
Dimensions					
Shape:	Round Conical		External diameter bottom:	252,5 mm +/- 3 mm	
External dia top without lid:	300 mm +/- 3 mm		Height without lid:	331,7 mm +/- 3 mm	
External dia top with lid:	300 mm +/- 3 mm		Height with std lid:	333,7 mm +/- 3 mm	
Weight					
Weight container/pot:	590 g +/- 10 g		Weight plastic handle:	0 g +/- 0 g	
Weight standard lid:	114 g +/- 6 g		Weight metal handle:	47 g +/- 1 g	
Performance					
Stackability - dynamic:	Max: 60 kg Max top load on bottom container at 23°		UN approval:	No	
Stacking tests:	<p>Special: The stacking tests have been performed with the standard raw material as stated above at 23° C over a period of 2 months. Stackability depends on many factors and the above data is meant as an indication only. Consequently, customers should make internal trials to determine the viability of stacking and transportation.</p>				
Closure system			Handle		
Lid type options:	FlakeFree, Standard		Handle available:	Standard steel with roller grip	
Closure type:	Flex-off				
Protective collar:	Yes				
Tamper Evidence type:	Break-out				
Decoration					
Decoration available:	Dry Offset		Decoration area offset:	832 x 240 mm without overlap	
Packing					
On pallet 1200x800:	NA pcs.		On pallet 1320x1000:	325 pcs.	
Pieces per layer:	NA pcs.		Pieces per layer:	13 pcs.	
Height incl. pallet:	NA m		Height incl. pallet:	1,71 m	
Stackability, empty:	NA pallets high		Stackability, empty:	2 pallets high	
Raw material					
Raw material options:	PP		Masterbatch colours:	Colours according to RPC Superfos standard selected pantone colours.	
Hot filling:	<p>Hot temperatures: The material chosen has a very good heat resistance and the packaging is suitable for hot filling. Notably, plastic packaging become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The RPC Superfos packaging must be tested by the customer with the actual product before approval for use at hot temperatures</p>				
	<p>Cold temperatures: Freezing conditions require special resins available on request. The RPC Superfos packaging must be tested by the customer with the actual product before approval for use at low temperatures</p>				

Quality Specifications

Approvals:	All RPC Superfos Products comply with the European Union Commission Regulation No. 10/2011/EC with amendments, relating to materials and articles intended to come into contact with food, unless otherwise stated. In accordance with EU legislation, it is the responsibility of the customer to ensure that the supplied product is suitable for the intended use.
Shelf life:	The compliance of the product to the technical specifications in this data sheet is guaranteed for 12 months after the date of the delivery subject to suitable storage. Suitable storage include protection of e.g. direct sun light, rain, very low temperatures or very high temperatures over a long period.
Quality information:	Deviations in the product specifications in this data sheet of 0.025% or less (i.e. 25 items per 100,000) are considered acceptable in the industry and therefore cannot be construed as a defect. Also, please refer to the Standard Sales and Delivery Terms in force at the time of delivery.

Specifications are subject to change without notice. Version 10.2

Latest revision : 12/05/2014