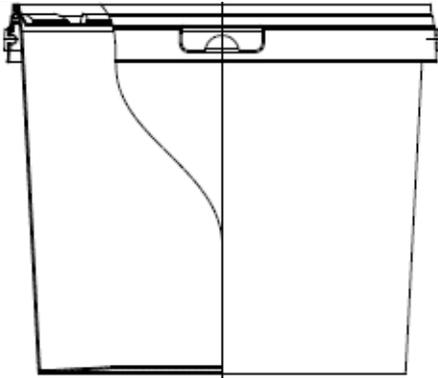



| | | | |
|---|---|--|--|
|  | | SuperLift ø226 mm 4,6 ltr | |
| | | Logical no: 8044 Available lids: 1671 (standard), 4058 (membrane) | |
| Volume | | | |
| Volume under lid: | 4,6 ltr +/- 50 ml | Volume brimful: | 4,9 ltr +/- 50 ml |
| Dimensions | | | |
| Shape: | Round Conical | External diameter bottom: | 197,8 mm +/- 2 mm |
| External dia top without lid: | 227 mm +/- 2 mm | Height without lid: | 152 mm +/- 2 mm |
| External dia top with lid: | 227 mm +/- 2 mm | Height with std lid: | 153,1 mm +/- 2 mm |
| Weight | | | |
| Weight container/pot: | 137 g +/- 6 g | Weight plastic handle: | 6 g +/- 2 g |
| Weight standard lid: | 38 g +/- 4 g | Weight metal handle: | g +/- g |
| Performance | | | |
| Stackability - dynamic: | Max: 20 kg Max top load on bottom container at 23° | UN approval: | No |
| Stacking tests: | Special: The stacking tests have been performed with the standard raw material as stated above at 23° C over a period of 2 months. Stackability depends on many factors and the above data is meant as an indication only. Consequently, customers should make internal trials to determine the viability of stacking and transportation. | | |
| Closure system | | Handle | |
| Lid type options: | Standard, Membrane | Handle available: | Flexible plastic on collar |
| Closure type: | Peel-off | | |
| Protective collar: | Yes | | |
| Tamper Evidence type: | Break-out | | |
| Decoration | | | |
| Decoration available: | Dry Offset | Decoration area offset: | 635 x 105 mm without overlap |
| Packing | | | |
| On pallet 1200x800: | 684 pcs. | On pallet : | NA pcs. |
| Pieces per layer: | 18 pcs. | Pieces per layer: | NA pcs. |
| |  | | |
| Height incl. pallet: | 1,25 m | Height incl. pallet: | NA m |
| Stackability, empty: | 3 pallets high | Stackability, empty: | NA pallets high |
| Raw material | | | |
| Raw material options: | PP | Masterbatch colours: | Colours according to RPC Superfos standard selected pantone colours. |
| Hot filling: | 85-95° C | Cold temperatures: | Freezing conditions require special resins available on request. The RPC Superfos packaging must be tested by the customer with the actual product before approval for use at low temperatures |
| Hot temperatures: The material chosen has a very good heat resistance and the packaging is suitable for hot filling. Notably, plastic packaging become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The RPC Superfos | | | |

packaging must be tested by the customer with the actual product
before approval for use at hot temperatures

Quality Specifications

| | |
|-----------------------------|---|
| Approvals: | All RPC Superfos Products comply with the European Union Commission Regulation No. 10/2011/EC with amendments, relating to materials and articles intended to come into contact with food, unless otherwise stated. In accordance with EU legislation, it is the responsibility of the customer to ensure that the supplied product is suitable for the intended use. |
| Shelf life: | The compliance of the product to the technical specifications in this data sheet is guaranteed for 12 months after the date of the delivery subject to suitable storage. Suitable storage include protection of e.g. direct sun light, rain, very low temperatures or very high temperatures over a long period. |
| Quality information: | Deviations in the product specifications in this data sheet of 0.025% or less (i.e. 25 items per 100,000) are considered acceptable in the industry and therefore cannot be construed as a defect. Also, please refer to the Standard Sales and Delivery Terms in force at the time of delivery. |

Specifications are subject to change without notice. Version 10.2

Latest revision : 06/05/2013