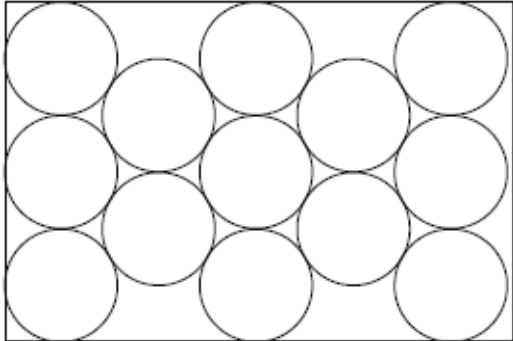
		SuperLift ø267 mm 11,2 ltr	
		Logical no: 8108 Available lids: 4083 (standard), 4108 (membrane)	
Volume			
Volume under lid:	11,2 ltr +/- 120 ml	Volume brimful:	11,8 ltr +/- 120 ml
Dimensions			
Shape:	Round Conical	External diameter bottom:	231 mm +/- 2 mm
External dia top without lid:	269 mm +/- 3 mm	Height without lid:	260,7 mm +/- 3 mm
External dia top with lid:	269 mm +/- 3 mm	Height with std lid:	261,9 mm +/- 3 mm
Weight			
Weight container/pot:	309 g +/- 8 g	Weight plastic handle:	11 g +/- 2 g
Weight standard lid:	60 g +/- 4 g	Weight metal handle:	0 g +/- 0 g
Performance			
Stackability - dynamic:	Max: 40 kg Max top load on bottom container at 23°	UN approval:	No
Stacking tests:	Special: The stacking tests have been performed with the standard raw material as stated above at 23° C over a period of 2 months. Stackability depends on many factors and the above data is meant as an indication only. Consequently, customers should make internal trials to determine the viability of stacking and transportation.		
Closure system		Handle	
Lid type options:	Standard, Membrane	Handle available:	Flexible plastic on collar
Closure type:	Peel-off		
Protective collar:	Yes		
Tamper Evidence type:	Break-out		
Decoration			
Decoration available:	Dry Offset, IML	Decoration area offset:	750 x 190 mm without overlap
Packing			
On pallet 1200x800:	416 pcs.	On pallet :	NA pcs.
Pieces per layer:	13 pcs.	Pieces per layer:	NA pcs.
			
Height incl. pallet:	1,46 m	Height incl. pallet:	NA m
Stackability, empty:	2 pallets high	Stackability, empty:	NA pallets high

Raw material

Raw material options:	PP	Masterbatch colours:	Colours according to RPC Superfos standard selected pantone colours.
Hot filling:	85-95 °C		

Hot temperatures:

The material chosen has a very good heat resistance and the packaging is suitable for hot filling. Notably, plastic packaging become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The RPC Superfos packaging must be tested by the customer with the actual product before approval for use at hot temperatures

Cold temperatures:

Freezing conditions require special resins available on request. The RPC Superfos packaging must be tested by the customer with the actual product before approval for use at low temperatures

Quality Specifications

Approvals:	All RPC Superfos Products comply with the European Union Commission Regulation No. 10/2011/EC with amendments, relating to materials and articles intended to come into contact with food, unless otherwise stated. In accordance with EU legislation, it is the responsibility of the customer to ensure that the supplied product is suitable for the intended use.
Shelf life:	The compliance of the product to the technical specifications in this data sheet is guaranteed for 12 months after the date of the delivery subject to suitable storage. Suitable storage include protection of e.g. direct sun light, rain, very low temperatures or very high temperatures over a long period.
Quality information:	Deviations in the product specifications in this data sheet of 0.025% or less (i.e. 25 items per 100,000) are considered acceptable in the industry and therefore cannot be construed as a defect. Also, please refer to the Standard Sales and Delivery Terms in force at the time of delivery.

Specifications are subject to change without notice. Version 10.2

Latest revision : 12/12/2011